


Options

For Style 6S / 12S




For Style 12




- BT Chrono ref. : 936400**
 Elapsed time control unit (hour minute second)
 Count-up and down operation
 Split time
 For hospitals, recording studios, sports halls...
 Supplied with a 5-m cable (Max. length 20m.).

- Temperature probe ref. : 935011**
 Supplied with a 5-m cable.

Dimensions (mm)

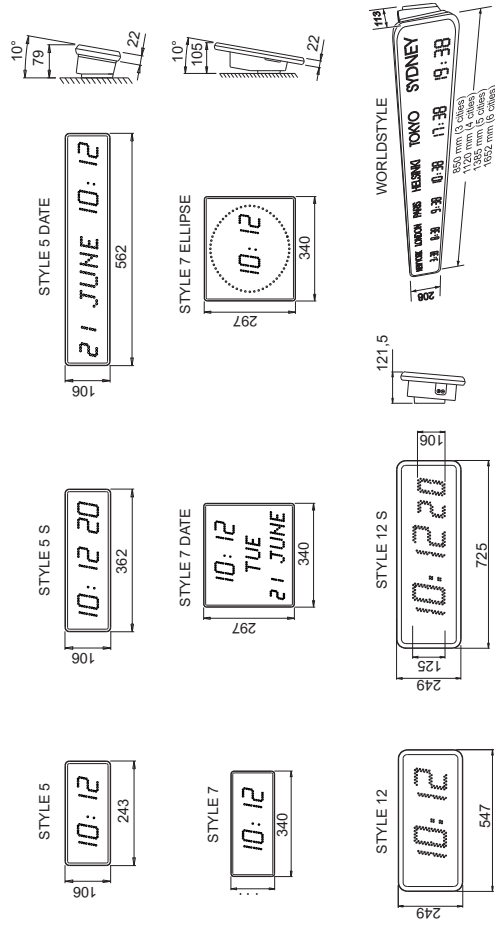

Mounting

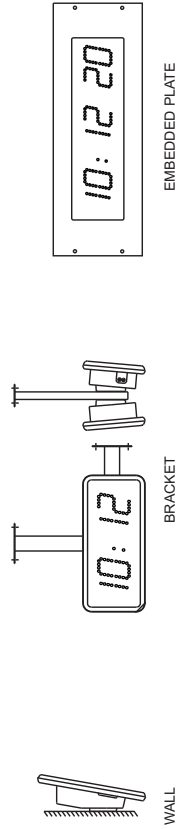

Style



Luminous digital clocks



Auto Time Systems
 Telephone: 0161 776 4132
www.autotimesystems.co.uk



Technical features

Style

Common features

- Power supply: 230V -10% 50/60Hz.
- Brightness setting on 4 levels.
- Automatic pre-programmed summer/winter time changeover.
- Large viewing angle filter.
- Time basis accuracy 0.2 sec/day - Absolute with radio antenna.
- Silent operation.
- Programming and time setting through two buttons.
- Viewing angle: 120°.


Style 5/7 features

- Injected ABS casing (fireproof) - Matt black.
- Data back-up for 7 days in case of power failure.
- 12 or 24 hours display mode.
- Perpetual calendar.
- Operating temperature : -5 to +50°C.

Style 12 features

- Aluminium casing - Matt black.
- Data back-up for 3 days in case of power failure.
- Red or Yellow high brightness LED providing perfect outdoor reading.
- Manual adjustment of brightness on 4 levels for indoor clock. Automatic adjustment of brightness through photo cells for outdoor clock.
- Automatic adjustment of brightness through photo cells for outdoor clock.

LED colours

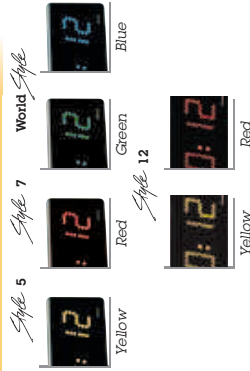

Style 5 range, 5-cm display

Style 5



Display: hour minute or alternating with date or week number

Style 5 S



Display: hour minute second
Option: inner control unit with clock/time and count-up/count-down switches for alternate 2 languages, recording studies...

Style 5 date

Display: hour minute
Multilingual calendar
2 languages among 14
Perpetual calendar



Style 7 range, 7-cm display

Style 7



Display: hour minute or alternating with date or week number.

Style 7 date

Display: hour minute date
Multilingual calendar
Day of the week, week number or day number (1 to 365)
Possible to alternate 2 languages among 14
Perpetual calendar.



Style 7 Ellipse

Display: hour minute and sweep-second or alternating with date or week number



Style 12 range, 12-cm display

Style 12

Display: hour minute or alternating with date or temperature.



Style 12 S

Display: hour minute second
Inner control unit with clock/time and count-up/count-down switches for remote control of the clock in operating theatres, recording studios...



World Style range, 5-cm display



WorldStyle 3 cities

Display: hour minute
Choice of city
Local times programmed in factory and modifiable on site
Automatic time changeover.

Multi time zone display clock



WorldStyle 4 cities



WorldStyle 5 cities



WorldStyle 6 cities

	STYLE 5	STYLE 5 S	STYLE 5 DATE	STYLE 7	STYLE 7 DATE	STYLE 7 ELLIPSE	STYLE 12	STYLE 12 S	WORLD STYLE 3 V	WORLD STYLE 4 V	WORLD STYLE 5 V	WORLD STYLE 6 V
Digit height (mm)	50 mm	50 mm	50 mm	Digit 70 mm	Digit 70 mm	Digit 70 mm	125 mm	125 mm	70 mm	70 mm	70 mm	70 mm
Viewing Distance (m)	20	20	20	25	25	25	50	50	25	25	25	25
Weight (kg)	0,8	1,1	1,6	1,1	2,1	2,2	5	6,3	9	12	15	18
Protection index	IP 30	IP 30	IP 30	IP 30	IP 30	IP 30	IP 51	Indoor : IP 51 Outdoor : IP 53	IP 41	IP 41	IP 41	IP 41
Power (W)	9,2	12,7	23	15	34,5	18,4	12,4	19,5	27,6	36,8	46	55,2

Operation: Independent or impulse receiver
Radio synchronised by France Inter or DCF (except Style 5 range)
AFNOR receiver
DHF receiver
IP receiver via IP/AFNOR interface

Bodet